


LED Acorn Colonial Wattage and Color Tunable

DIMENSION

POST TOP LIGHT

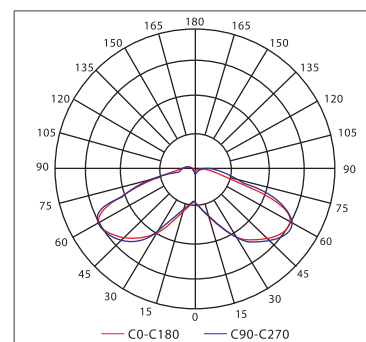

PHOTOMETRIC

WATTAGE & CCT Tunable

MODEL NO.	AVAILABLE WATTAGE	LUMENS	AVAILABLE	CRI	POWER FACTOR
VE-TP468 -80MW-50KMC-LV-D	80W-60W-40W	9,600LM-7,800LM-5,600LM	3000K-4000K-5000K	>70	>0.92



WATT

80W
1 2

60W
1 2

40W
1 2

3000K
4000K
5000K

CCT

Spinned Aluminum Cover with Powder Coated



High Efficacy LED Moduler

Optional Photocell

High Pressure Dia Casting Base



Polycarbonate Housing

SINGLE WATTAGE&CCT

	VOL TAGE (V)	WATT(W)	5000K EFFICACY (LM/W)	5000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	CRI	POWER FACTOR	AVAILABLE CCT(K)
	120-277	40	110	4400	Type V	100-175W HID	Available	>75	>0.92	4000 5000
	120-277	60	112	5880	Type V	250-320W HID	Available			
	120-277	80	109	8720	Type V	250-400W HID	Available			