

V4 Garage Parking Lot LED Light



FEATURES

- Built in Power and CCT adjustable
- Built in Motion sensor receptacle port
- Wide beam angle with advanced PC optics.
- Anti-corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Shopping mall/Building/Airport Garage Parking lot lighting
- Underground Garage Parking lot lighting



CONSTRUCTION:

Heavy die-cast aluminum alloy housing bronze powder-coated finish.

ELECTRICAL:

Available as 120-277V input. -20°C to 45°C.

OPTICAL SYSTEM:

Lumileds 2835LED chips. High quality light transmittance PC optics.150° beam angle.

INSTALLATION&MOUNTING:

ceiling mount or 3/4" conduit entry on top for pendant mounting (pendant provided by others)

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

Sample
VE-4NCP80/60/40W-H-TX(XX)-Y

Wattage	Power Factor	Motion Detection	Voltage/CurrentInput		Light Efficiency	CCT tunable
			120V	277V		
40W	0.9	40FT	0.33A	0.14A	130LM/W	3500K/4000K/5000K
60W	0.9	40FT	0.50A	0.21A	130LM/W	3500K/4000K/5000K
80W	0.9	40FT	0.66A	0.28A	130LM/W	3500K/4000K/5000K

V4 Garage Parking Lot LED Light

Motion Sensor Compatible

HD07VR-MH Occupancy sensor:plug and play

CCT&Power Adjustable

The lamps have the function of adjusting power and color temperature

PRODUCT ORDERING GUIDE

VE-4NCP80/60/40W-H-TX(XX)-Y

1

2

3

4

5

6

VE

4NCP

80/60/40W

H

TX(XX)

Y

☒ LS

LEDsION

☒ 4NCP

G4 New canopy

Power Tunable

☒ 80W Power 80W

☐ 60W Power 60W

☐ 40W Power 40W

H/L High/Low Light Efficiency

TX(XX):CCT Tunable

☐ 35K CCT:3500K

☐ 40K CCT:4000K

☒ 50K CCT:5000K

Y ☒ YES Motion Sensor


N ☐ NO Motion Sensor

Electric Characteristic

Specification/Model	VE-4NCP80/60/40W-H-TX(XX)-Y	VE-4NCP80/60/40W-H-TX(XX)-Y	VE-4NCP80/60/40W-H-TX(XX)-Y
LED Driver	UL listed WEPowerLED Brand 0-10V Dimmable		
Input power	80W	60W	40W
Lumens output	10400LM	7800LM	5200LM
Light Efficiency	130LM/W	130LM/W	130LM/W
CRI	>80	>80	>80
Color Temperature	5000K	5000K	5000K
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	150D	150D	150D
Working temperature	-20+45℃	-20+45℃	-20+45℃
Junction temperature	<75℃	<75℃	<75℃
Lamp Efficiency	≥90%	≥90%	≥90%
Certificate	UL CUL DLC	UL CUL DLC	UL CUL DLC
Equivalent	180-250W MH/HP S	120-180W MH/HP S	80-120W MH/HP S

V4 Garage Parking Lot LED Light

DIMENSION

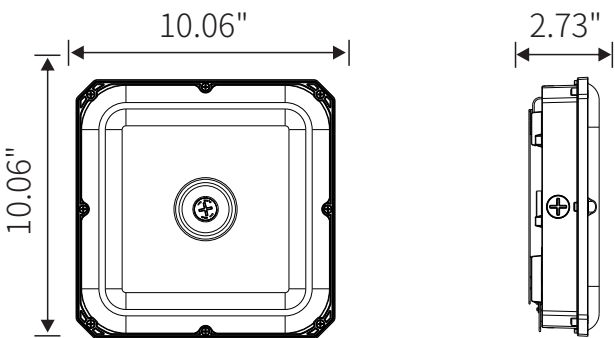

DISTRIBUTION DIAGRAM

